

# BJELIN




## Vista Oak



**GRADING:** Multi-Strip



Hardwood From The  
Spačva Forest In Croatia

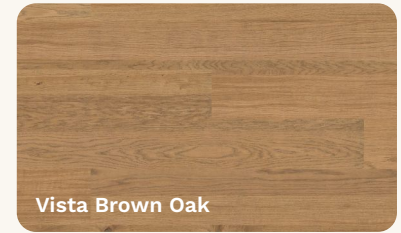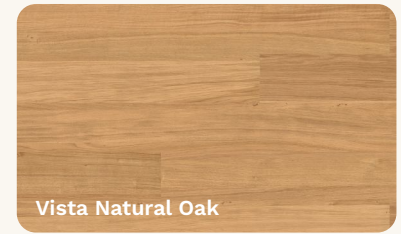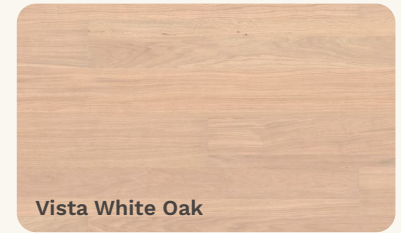

### PRODUCT DETAILS

<b>PRODUCT</b>	Woodura Planks 3.0
<b>STAINING COLORS</b>	3
<b>WOOD TYPE</b>	European White Oak
<b>DIMENSIONS</b>	7.9" x 79.9" x 9.2mm
<b>TYPE OF FLOORING</b>	Hardened wood
<b>GRADING</b>	Multi-Strip
<b>BEVEL</b>	Long and short side
<b>CORE</b>	Välinge Compositek core
<b>VENEER THICKNESS</b>	0.6mm
<b>SURFACE TREATMENT</b>	UV cured acrylic
<b>SURFACE TEXTURE</b>	Smooth Finish
<b>TRANSITIONS</b>	Install 82 ft in any direction without transitions

### PACKAGING

<b>PLANKS PER PACKAGE</b>	6
<b>AREA PER PACKAGE</b>	26.22 sqft
<b>WEIGHT OF PACKAGE</b>	48.28 lbs



**woodura®**  
PATENTED SURFACE TECHNOLOGY

### CLASSIFICATION

	Classification	Result
<b>SMOKE DENSITY</b>	ASTM E662	Passes
<b>CRITICAL RADIANT FLUX</b>	ASTM E648	Class 1
<b>THERMAL CONDUCTIVITY</b>	ASTM C518	1.2472 Vlu in/h ft2 F
<b>FORMALDEHYDE</b>	ASTM D6007	Passes
<b>SLIP RESISTANCE</b>	A137.1/A326.3	Wet: 0.73
<b>THERMAL RESISTANCE</b>	EN 12667	0.075 (m <sup>2</sup> x K)/W
<b>BRINELL HARDNESS</b>	EN 1534	8 HB (mv)
<b>IMPACT RESISTANCE</b>	EN 14354	EC2
<b>THICKNESS SWELLING</b>	EN 14354	<10%
<b>WEAR RESISTANCE</b>	EN 14354	>2000 cycles*
<b>SLIP RESISTANCE</b>	EN 14342:2013	EU: With slider 55: 66 GB: With slider 96: 62

<b>STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM</b>	EN ISO 10140-3 EN ISO 717-2	18-20 dB
--	--------------------------------	----------

\*When tested on a flat surface

### LEED SCORE

<b>LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS</b>	1 Point
<b>LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS</b>	1 Point
<b>LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS</b>	1 Point
<b>LEED V4 MR CREDIT: ENVIRONMENTAL PRODUCT DECLARATIONS</b>	1 Point



800.492.8722  
UrbanSurfaces.com