

# BJELIN



## XL Walnut




GRADING: Nature



American Walnut

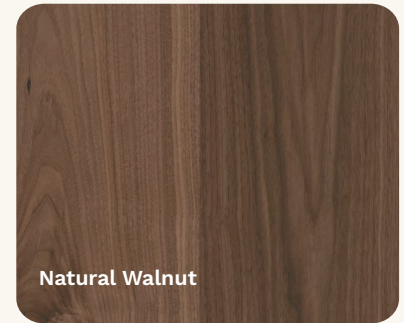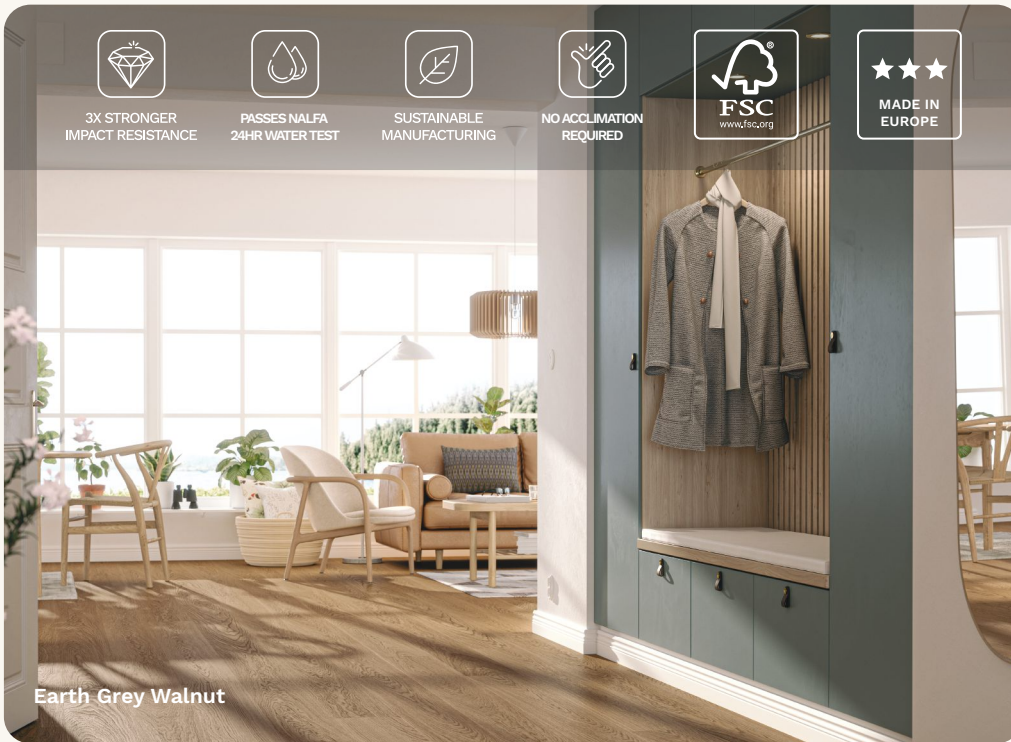

Natural Walnut

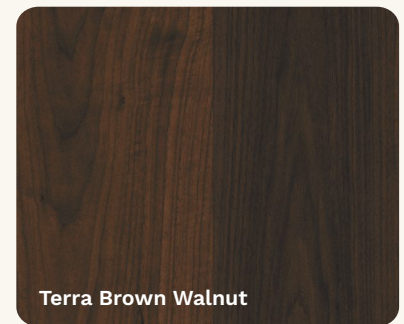

Terra Brown Walnut



3X STRONGER  
IMPACT RESISTANCE



PASSES NALFA  
24HR WATER TEST



SUSTAINABLE  
MANUFACTURING



NO ACCLIMATION  
REQUIRED



### PRODUCT DETAILS

**PRODUCT** Woodura Planks 3.0

**STAINING COLORS** 2

**WOOD TYPE** American Walnut

**DIMENSIONS** 8.1" x 86.6" x 11.3mm

**TYPE OF FLOORING** Hardened wood

**GRADING** Nature

**BEVEL** Micro Bevel

**CORE** Välinge Compositek core

**VENEER THICKNESS** 0.6mm

**SURFACE TREATMENT** UV cured acrylic

**SURFACE TEXTURE** Smooth finish

**TRANSITIONS** Install 82 ft in any direction without transitions

### PACKAGING

**PLANKS PER PACKAGE** 4

**AREA PER PACKAGE** 19.51 sqft

**WEIGHT OF PACKAGE** 43.87 lbs

### CLASSIFICATION

	Classification	Result
<b>SMOKE DENSITY</b>	ASTM E662	Passes
<b>CRITICAL RADIANT FLUX</b>	ASTM E648	Class 1
<b>THERMAL CONDUCTIVITY</b>	ASTM C518	1.2472 Vlu in/h ft2 F
<b>FORMALDEHYDE</b>	ASTM D6007	Passes
<b>SLIP RESISTANCE</b>	A137.1/A326.3	Wet: 0.73
<b>THERMAL RESISTANCE</b>	EN 12667	0.07 (m2 x K)/W
<b>BRINELL HARDNESS</b>	EN 1534	10 HB (mv)
<b>IMPACT RESISTANCE</b>	EN 14354	EC3
<b>THICKNESS SWELLING</b>	EN 14354	<8%
<b>WEAR RESISTANCE</b>	EN 14354	>6000 cycles*
<b>SLIP RESISTANCE</b>	EN 14342:2013	EU: With slider 55: 66 GB: With slider 96: 62
<b>STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM</b>	EN ISO 10140-3 EN ISO 717-2	18-20 dB

\*When tested on a flat surface

### LEED SCORE

<b>LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS</b>	1 Point
<b>LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS</b>	1 Point
<b>LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS</b>	1 Point
<b>LEED V4 MR CREDIT: ENVIRONMENTAL PRODUCT DECLARATIONS</b>	1 Point



GREENGUARD

PRODUCT CERTIFIED FOR  
LOW CHEMICAL EMISSIONS  
UL.COM/CGG  
UL 2818

GOLD



woodura®  
PATENTED SURFACE TECHNOLOGY



800.492.8722  
UrbanSurfaces.com