

BJELIN

XXL Ash




GRADING: Select



European Hardwood



Powder White Ash

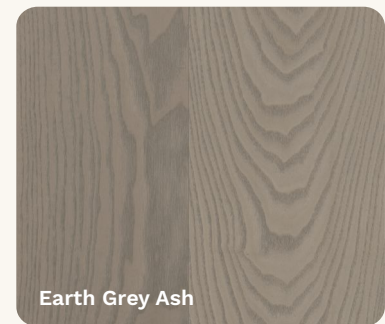

Earth Grey Ash



3X STRONGER
IMPACT RESISTANCE



PASSES NALFA
24HR WATER TEST



SUSTAINABLE
MANUFACTURING



NO ACCLIMATION
REQUIRED



MADE IN
EUROPE

Powder White Ash

PRODUCT DETAILS

PRODUCT Woodura Planks 3.0

STAINING COLORS 2

WOOD TYPE European Ash

DIMENSIONS 10.7" x 93.6" x 11.3mm

TYPE OF FLOORING Hardened wood

GRADING Select

BEVEL Micro Bevel

CORE Välinge Compositek core

VENEER THICKNESS 0.6mm

SURFACE TREATMENT UV cured acrylic

SURFACE TEXTURE Smooth finish

TRANSITIONS Install 82 ft in any direction without transitions

PACKAGING

PLANKS PER PACKAGE 3

AREA PER PACKAGE 20.81 sqft

WEIGHT OF PACKAGE 47.78 lbs



GREENGUARD

PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL.COM/CGG
UL 2818

GOLD



woodura®

PATENTED SURFACE TECHNOLOGY

CLASSIFICATION

	Classification	Result
SMOKE DENSITY	ASTM E662	Passes
CRITICAL RADIANT FLUX	ASTM E648	Class 1
THERMAL CONDUCTIVITY	ASTM C518	1.2472 Vlu in/h ft2 F
FORMALDEHYDE	ASTM D6007	Passes
SLIP RESISTANCE	A137.1/A326.3	Wet: 0.73
THERMAL RESISTANCE	EN 12667	0.07 (m2 x K)/W
BRINELL HARDNESS	EN 1534	10 HB (mv)
IMPACT RESISTANCE	EN 14354	EC3
THICKNESS SWELLING	EN 14354	<8%
WEAR RESISTANCE	EN 14354	>6000 cycles*
SLIP RESISTANCE	EN 14342:2013	EU: With slider 55: 66 GB: With slider 96: 62
STEP SOUND REDUCTION WHEN USING 2MM UNDERLAY FOAM	EN ISO 10140-3 EN ISO 717-2	18-20 dB

*When tested on a flat surface

LEED SCORE

LEED V4 EQ CREDIT: LOW-EMITTING MATERIALS	1 Point
LEED V4 MR CREDIT: ENVIRONMENTALLY PREFERABLE PRODUCTS	1 Point
LEED V4 MR CREDIT: RESPONSIBLE SOURCING OF RAW MATERIALS	1 Point
LEED V4 MR CREDIT: ENVIRONMENTAL PRODUCT DECLARATIONS	1 Point



800.492.8722
UrbanSurfaces.com